

Wall Mounted LiFePO₄ Battery

LFP-W51.2-300 Lithium Battery Floor Type



High Cycle Life

6000 cycles @80%DOD, 25°C for effectively lower cost total of ownership.



Longer Service Life

Low maintenance batteries with stable chemistry.



Built In Circuit Protection

Battery Management System (BMS) is incorporated against abuse.



Better Storage

Up to 6 months thanks to its extremely low self discharge (LSD) rate and risk of sulphation.




Quickly Recharge

Save time and increase productivity with less down time thanks to sup charge/discharge efficiency.




Extreme Heat Tolerance

Suitable for use in a wider range of applications where ambient temper is unusually high: up to +60°C

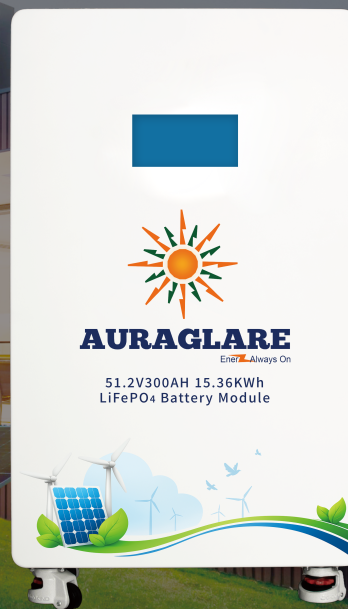

Product Dimension Diagram

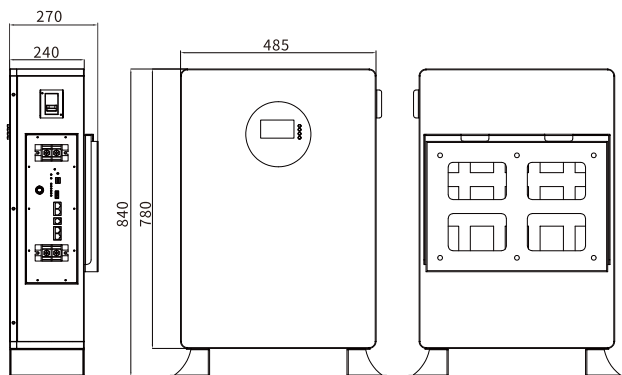

Unit: mm

Application

- Electric vehicles.
- Solar/wind energy storage system.
- UPS, backup power.
- Telecommunication
- Medical equipment
- Lighting

FC IEC CE UN38.3 MSDS


Electrical Characteristics	
Nominal Voltage	51.2V
Nominal Capacity	300Ah (C ₅ , 25°C)
Energy	15360Wh
Internal Resistance	≤10mΩ@50%SOC
Cycle Life	>6000 cycles
Months Self Discharge	<3%
Efficiency of Charge	100% @ 0.5C
Efficiency of Discharge	96-99% @ 0.5C
Standard Charge	
Charge Mode	0.2C to 58.4V, then 58.4V, charge to current till 0.02C(CC/CV)
Continuous Current	150A
Recom. Charge Current	60A
Max. Charge Current	200A
Charge Cut-off Voltage	58.4V ± 0.2V
Standard Discharge	
Continuous Current	150A
Recom. Discharge Current	60A
Max. Discharge Current	200A
Discharge Cut-off Voltage	43.2V
Environmental	
Charge Temperature	0 °C to 45 °C (32°F to 113°F) @ 60 ± 25% Relative Humidity
Discharge Temperature	-20 °C to 60 °C (-4°F to 140°F) @ 60 ± 25% Relative Humidity
Storage Temperature	0 °C to 40 °C (32°F to 104°F) @ 60 ± 25% Relative Humidity
IP Grade	IP54
Mechanical	
Cell & Method	3.2V280AH-16S1P
Metal Case	Metal
Dimensions (mm.)	780x485x240 (Package: 910x550x409)
Weight (kg.)	N.W.: 115Kg / G.W.: 131.6Kg
Terminal	200A Connector
Communication	RS485/RS232/CAN
BMS	16S200A
Parallel	Up to 16 units

Wall Mounted LiFePO₄ Battery


LFP-W51.2-300 Lithium Battery

» Model Performance Diagrams

Number of Cycles Vs. DOD

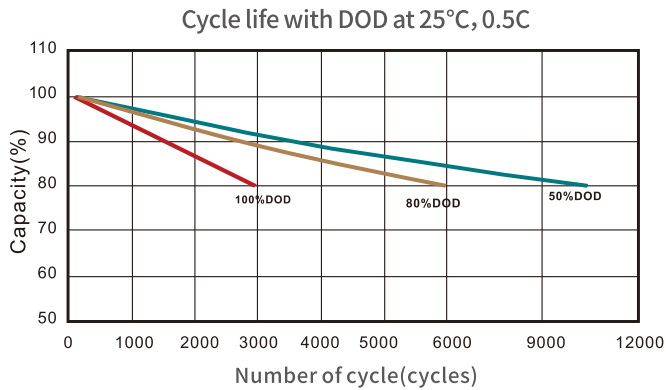


Discharge Performance at R.T.

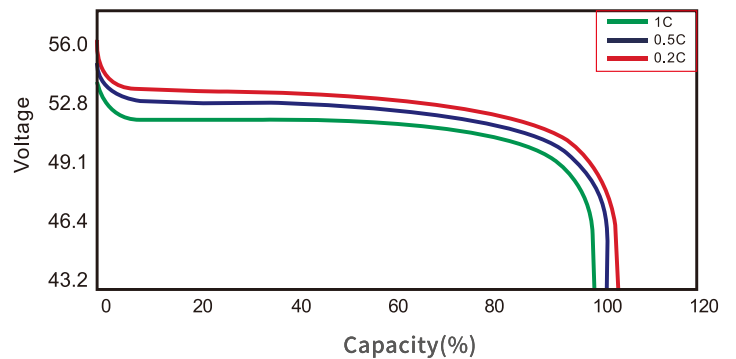


Battery Capacity (C) VS. Open Circuit Voltage (OCV)

SOC Vs OCV

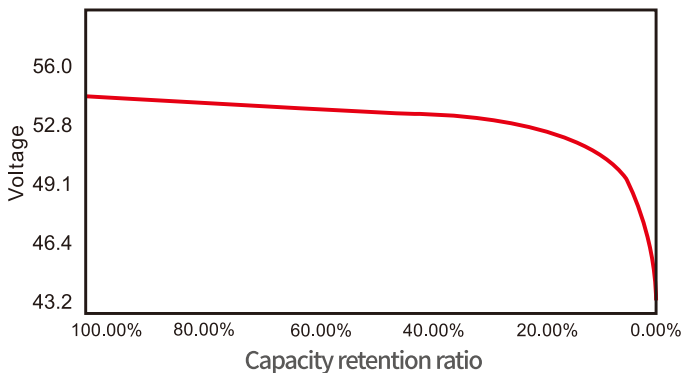


Battery Capacity Vs. Charging Time

Charging capacity(%) VS time with different rate at 25°C

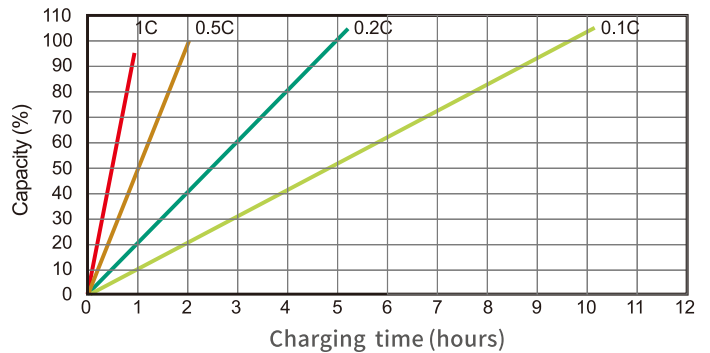

Cycle Life in Relation to Temperature

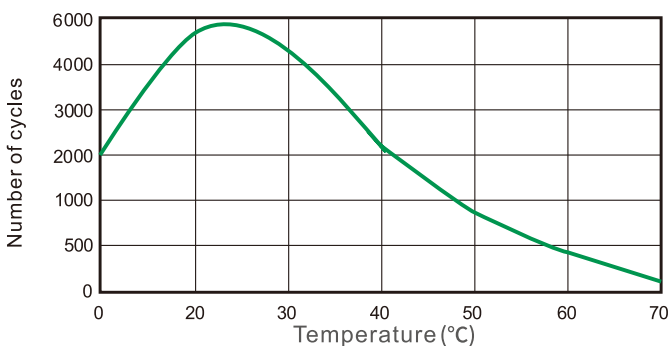

Temperature Effects on Capacity

